



*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

TWO-LANE/TWO-WAY

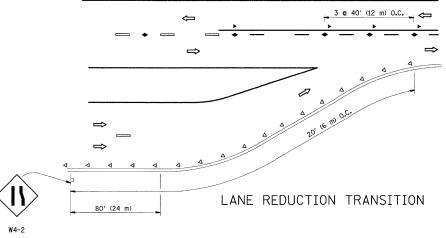

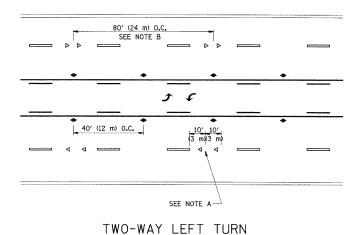

80' (24 m) O.C.


SEE NOTE B

40' (12 m) O.C.

3 m)(3 m)

SEE NOTE A

MULTI-LANE/UNDIVIDED

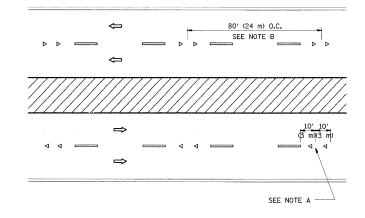

MULTI-LANE/DIVIDED

GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES


- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.
- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

SYMBOLS

--- YELLOW STRIPE

WHITE STRIPE

- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (₩/O)
- ◆ TWO-WAY AMBER MARKER

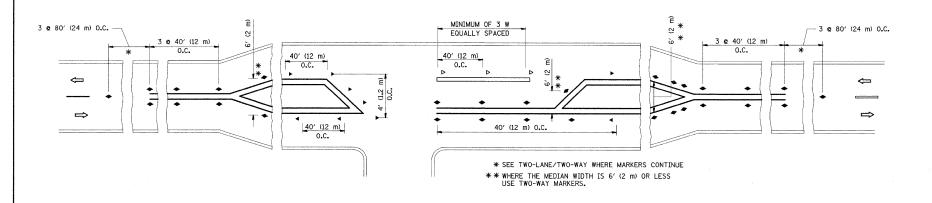

LEFT TURN

* FAU 3562 & FAU 1504

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME = USER NAME = abebawa DESIGNED - REVISED -T. RAMMACHER 09-19-94

ci\pm_mork\pwidet\abebawa\d2157545\Dist\$ td.dgn DRAWN - REVISED -T. RAMMACHER 03-12-99

PLOT SCALE = 50.0000 '/ IN. CHECKED - REVISED -T. RAMMACHER 01-06-00

PLOT DATE = 11/28/2009 DATE - REVISED - C. JUCIUS 09-09-09

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TYPICAL APPLICATIONS

RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)

SOURCE NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.